
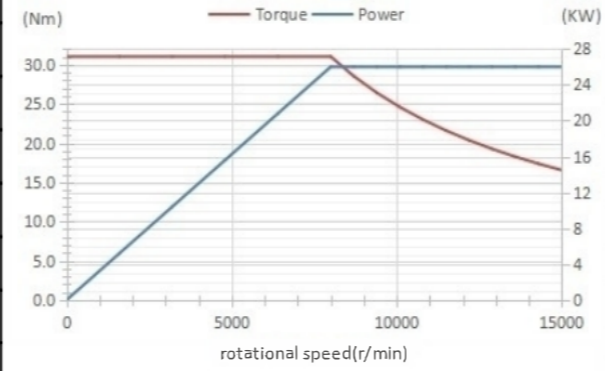


Spindle specification				
SPEED	8000	15000		r/min
Frequency	400	750		Hz
Power(S1)	26	26		kW
Torque(S1)	31.8	16.5		Nm
Voltage	206	380		V
Current(S1)	62	55		A
Motor type	Synchronous	Eencoder	z=256,m=0.3,1Vpp	
Lubricant	Grease	Rotation	right and left	
Operating position	horizontal to vertical	Front seal	Protecting air flow,1-1.5bar	
ATC cylinder	hydraulic pressure unclamp 80-85bar,air pressure clamp 5bar			
Interface	HSK E50 DIN6989 clamping force 11000N			
Air quality	Filtration and drying, particle size 5 microns, residual oil content 0.5mg/m <sup>3</sup>			
Spindle Coolant	Water,flow rate 5L/min@25°C			

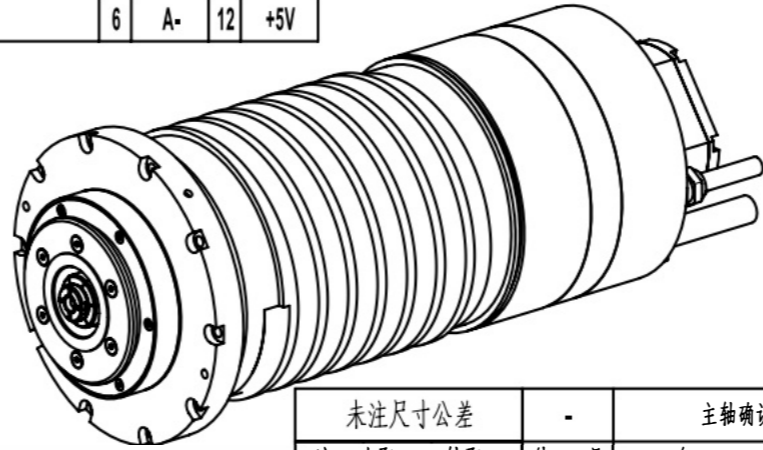

未注尺寸公差		-		主轴承确认图						
注: 孔取(+), 轴取(-)	件号	名称	数量	材料	硬度	备注				
Dimension/mm										
up	to	clearance								
-	6	±0.05								
6	30	±0.10								
30	120	±0.15								
120	250	±0.25								
250	500	±0.35								
500	1000	±0.45								
1000	1600	±0.55								
1600	2000	±0.65								
更改号	签字	日期	设计	校对	审核	批准				
			LYJSD		150XDJ15G26					
			设计		比例		重量			
			校对		1:2.5		42			
			标准化审核							
			工艺会签							
			审核							
			批准							