


Lable description			
NO.	Function	Interface	description
1	Water outlet	G3/8	With piping fitting,hose 12X10
2	oil air inlet	G1/8	With piping fitting,hose 6X4,1-1.5bar
3	oil air inlet	G1/8	With piping fitting,hose 6X4,1-1.5bar
4	Encoder connector	M23	
5	Thermal connector	M23	
6	Water inlet	G3/8	With piping fitting,hose 12X10
7	Power cable	M25X1.5	1m cable

Thermal Sensor Connector					
1	PT100 (Bearing)	7	---	13	---
2	PT100 (Bearing)	8	---	14	---
3	PT1000 (motor)	9	---	15	---
4	PT1000 (motor)	10	---	16	---
5	---	11	---	17	---
6	---	12	---		---

Encoder Connector			
1	B-	7	Shield
2	---	8	B+
3	Z+	9	---
4	Z-	10	0V
5	A+	11	.
6	A-	12	+5V

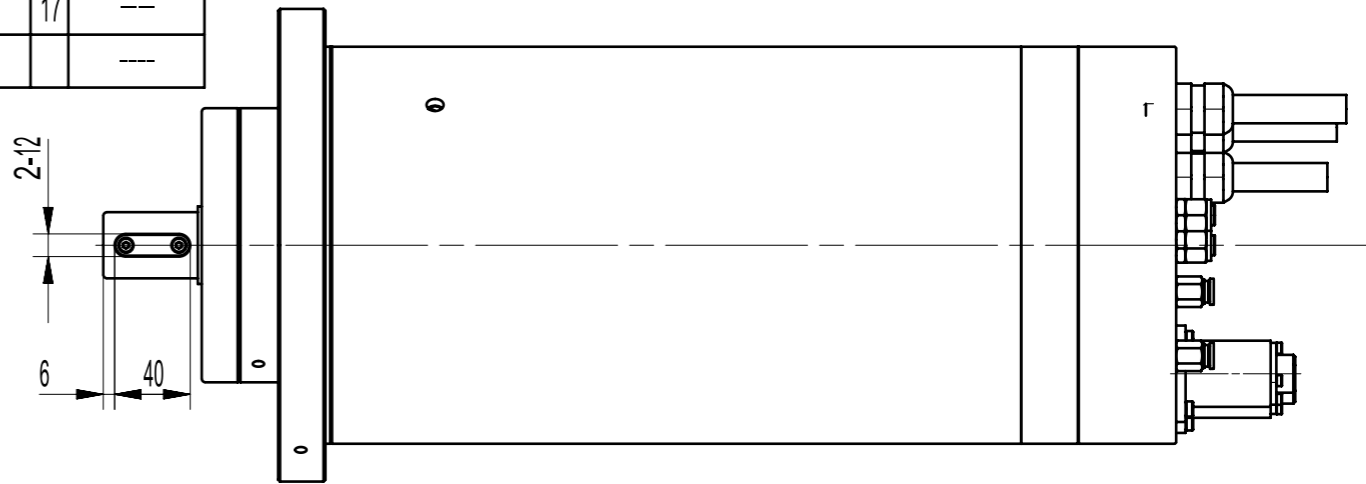

Motor Specification			
Speed	15000	25000	r/min
Power	100	100	kW
Voltage	366	380	V
Current	199	174	A
Frequency	500	833.3	Hz
Torque	64	38	Nm
Motor Type	Synchronous		
Lubrication	Oil air	Inertia	0.0137kg.m ²
Motor Coolant	Water,flow rate 10L/min@25°C		

未注尺寸公差	00	主轴外形		01				
注:孔取(+),轴取(-)	件号	名称	数量	材料	硬度	备注		
尺寸/mm								
大于	至	公差						
-	6	±0.05	<div style="display: flex; justify-content: space-between; align-items: center;"> LYJSD 210TD25Q100 </div>					
6	30	±0.10						
30	120	±0.15						
120	250	±0.25						
250	500	±0.35						
500	1000	±0.45						
1000	1600	±0.55						
1600	2000	±0.65	更改号	签字	日期	批准		