
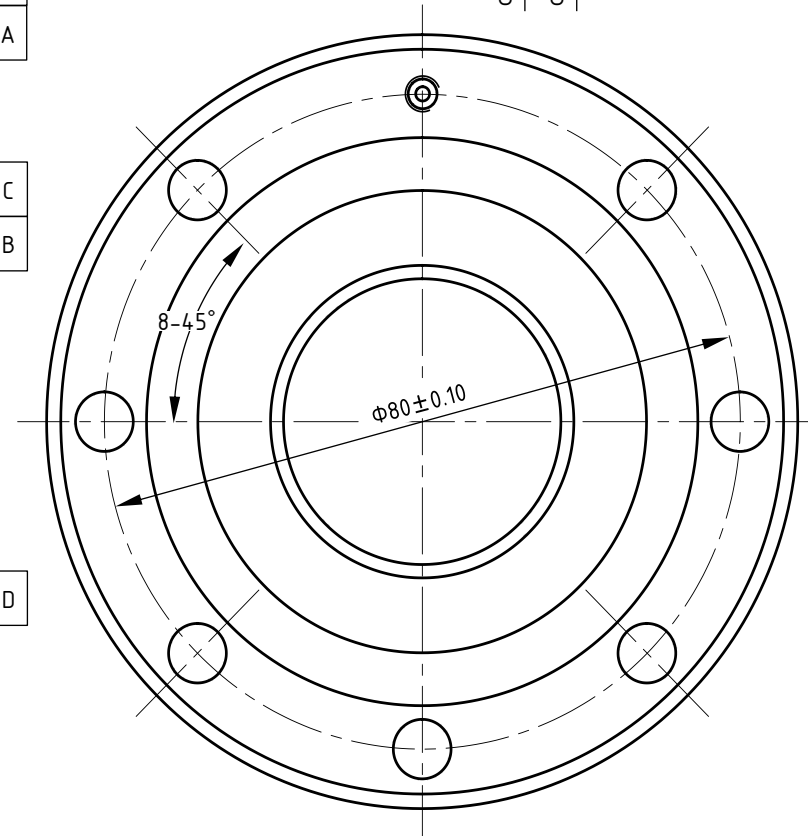




ZKLF40100-2RS-2AP-XL/P4



基本额定动载荷 Ca Basic Dynamic Load Rating	50.6 kN (Per Set)
基本额定静载荷 Coa Basic Static Load Rating	115.3 kN (Per Set)
预载荷(每套) Preload (Per Set)	2400 N
润滑脂牌号 Grease No.	As requested by the customer
润滑脂重量 Grease Quantity	25~40%

68		密封圈 Seal	2×2	NBR+10-GB/T 13237			
46		保持架 Cage	2×2	PA66-GF25			
04	GB/T 308.1 SΦ10.319	球 Ball	15×4	GCr15-GB/T 18254			61~66HRC
02		内圈 Inner Ring	2×2	GCr15-GB/T 18254			60~65HRC
01		外圈 Outer Ring	1×2	GCr15-GB/T 18254			59~64HRC

				LUOYANG SONGJU SCIENCE AND TECHNOLOGY CO.,LTD				推力角接触球轴承 Axial Angular Contact Ball Bearing	
标记	处数	区域	更改文件号	签名	图幅	比例	质量 (kg)	页数	ZKLF40100-2RS-2AP-XL/P4
设计					A3	NONE	2.92	1/1	
审核					图号				
批准									